



Aerospace Devices Inc.

Aerospace Devices Inc. designs, develops & produces all our next generation product lines to the highest FAA DO160G testing standards and engineers all our products to the highest flight safety designs. The SkyDock Design supports the mounting and installation in multiple locations and tight or limited space. Standard Aircraft Power input, saves installation, costs, and time. The SkyDock Product Line offers the industry's best Warranty.

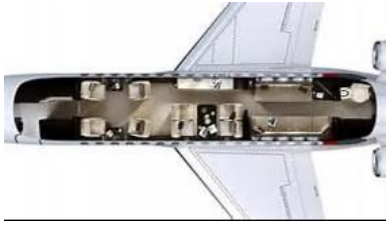

SkyDock™ SKD 100 Specifications

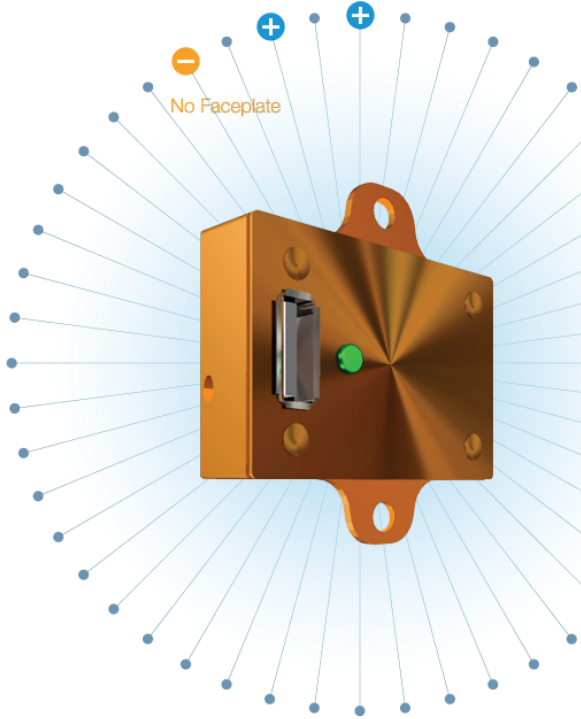

| | |
|---------------------------------------|------------------------|
| Operating input voltage range: | 13V - 30V |
| Main power standby current: | 0.1A at 28V |
| Max. efficiency: | 85% |
| Max. output current: | 2.7A at 4.75V to 5.25V |

USB 2.0 data connection option Max.

input voltage: 60V

Self reset power surge

Input/output overvoltage protection Static protection to 600V

Reverse power / short circuit protection Battery full charge auto power reduction Encapsulated, waterproof circuit board Power ON indicator light

Supports Apple Lightning™ USB requirement **MTBF:**

300,000 hours

Dimensions: W1.94 in x D1.48 in x H0.64 in

Weight: 1.5 oz

Wire length: 12 in

Positive wire: White

Negative wire: White / Black

Design registered*

Patent The SkyDock Product line is DO160G Certified for Fix Wing, Flight Deck & Rotorcraft Installation.

*April 2013



DO160G Sectional Testing QTP's an QTR's are available upon request.

The SkyDock Product line is offered with Customer specific additions, USB Type C, nput power connector installed, Specific Input power Cable protection and Data input / output.

Please call with your specifications or questions.

Aerospace Devices Inc.
18 Corriente, Irvine, CA
92614
Phone # 949 795 2889